

# FLEX+


## WHEN SPEED AND SENSITIVITY ARE COMBINED IN A SMALL OPTICAL BENCH

- General purpose solution with a PLUS
- Ideal for Low Light-Level Applications
- User-Interchangeable Slits and Filters
- Back-Thinned CCD Detector for Great Sensitivity
- Fast Acquisition – Up to 2587 Spectra per Second
- Software LightScan Included



### GENERAL PURPOSE SOLUTION WITH A PLUS

FLEX+ spectrometer is a compact and modular instrument with a great performance that fits any spectroscopic setup. The FLEX+ range offers the full package of the FLEX solution but with extra sensitivity and speed making this spectrometer perfect for user that require multiple applications with one spectrometer.

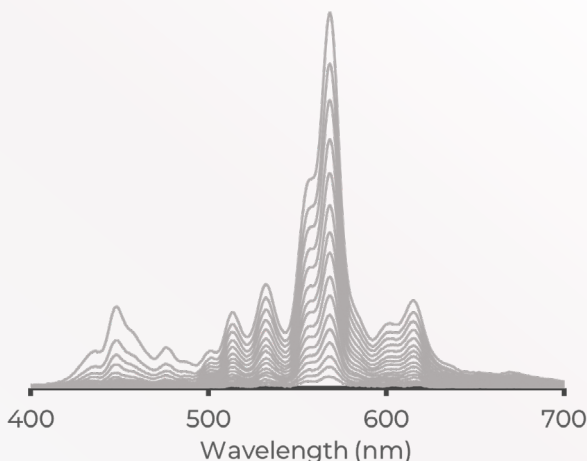

### FAST ACQUISITION FOR MONITORING REAL-TIME EVENTS

FLEX+ allows you to work with an integration time as low as 2 microseconds (with the electronic shutter on) and acquire up to 2587 spectra per second (in burst mode). This feature makes FLEX+ the ideal solution for chemical, biochemical and other applications where fast reactions need to be monitored.






## EASY TO INTEGRATE IN YOUR SETUP

The SMA fiber optic connector allows for a simple attachment of FLEX+ to a wide range of spectroscopic setups without the need for complex optical alignments. This flexibility is complemented with a trigger integration tool, which includes triggers in/out and delays. FLEX+ and all spectroscopic components of your setup can be centralized for full control with our new SPEC Hub solution.

## THE IDEAL SOLUTION FOR LOW LIGHT-LEVEL APPLICATIONS

The Hamamatsu back-illuminated CCD detector used on FLEX+ has great performance advantages such as low dark counts. The 1 mm height pixel elements on the detector provide high sensitivity for those applications that demand low light level measurements.

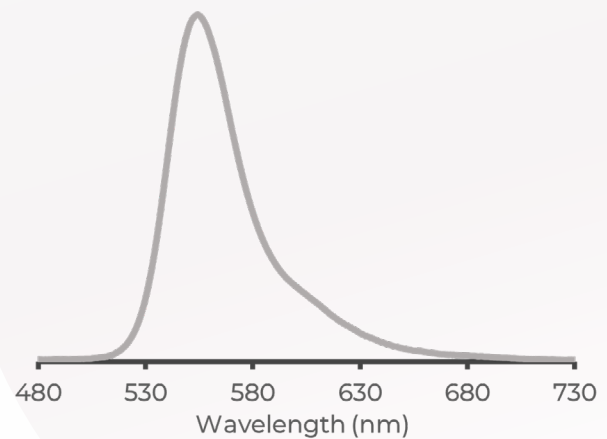

## CONTROL SENSITIVITY AND RESOLUTION OF YOUR SPECTROMETER

With FLEX+ you can take advantage of interchangeable slits and filters. User-interchangeable slits offer an easy and simple way of setting the optimal resolution/sensitivity while interchangeable filters provide the user with the ability to narrow the operational wavelength range of the spectrometer. These features allow you to change from an absorbance to a fluorescence setup in a few minutes. Add a SLIT KIT to your order and get all the flexibility you need.




+351 223 709 107



[www.sarspec.com](http://www.sarspec.com)



[info@sarspec.com](mailto:info@sarspec.com)





**FLUORESCENCE WITH CUVETTES**



**ABSORBANCE WITH CUVETTES**

## Technical Specifications

Parameter	UV-Vis-NIR	UV-Vis	Vis-NIR
<b>Operational Range</b>	185-1100 nm	185-900 nm	360-1100 nm
<b>Grating</b>	G-UV-Vis-NIR	G-UV-Vis	G-Vis-NIR
<b>Optical Resolution</b>	1.7 nm (25 um slit)	1.4 nm (25 um slit)	1.4 nm (25 um slit)
<b>Detector</b>	2048-element Back Thinned Hamamatsu		
<b>Fiber Connector</b>	SMA-905		
<b>Interface</b>	Mini-USB		
<b>Integration Time</b>	2 microseconds		
<b>Trigger</b>	In/Out		
<b>Software</b>	Lightscan		
<b>Dimensions</b>	110 mm (L) x 110 mm (D) x 40 mm (H) (Weight: 750 g)		

## Ordering Information

Description	Part Number	
	Standard Version	Improved Sensitivity
<b>Spectrometer FLEX+ UV/Vis/NIR</b>	PLUS-UV-Vis-NIR	PLUS-UV-Vis-NIR-IS
<b>Spectrometer FLEX+ UV/Vis</b>	PLUS-UV-Vis	PLUS-UV-Vis-IS
<b>Spectrometer FLEX+ Vis/NIR</b>	PLUS-Vis-NIR	PLUS-Vis-NIR-IS



+351 223 709 107



www.sarspec.com



info@sarspec.com

